MITSUBISHI ELECTRIC RESEARCH LABORATORIES
Cambridge, Massachusetts

Compressed Sensing for fusion frames

Petros Boufounos
Mitsubishi Electric Research Laboratories

Gitta Kutyniook
University of Osnabrück

Holger Rauhut
University of Bohn

COMPRESSED SENSING

Compressed Sensing Measurement Model

y A x

$n \times 1$
measurements

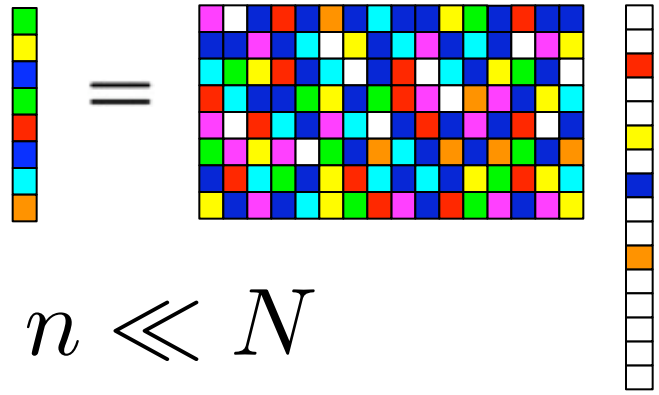

$N \times 1$
sparse
signal

K
nonzero
entries

$$K < n \ll N$$

- x is K-sparse or K-compressible
- A **random**, satisfies a *restricted isometry property (RIP)*

  A has RIP of order $2K$ with constant δ

  If there exists δ s.t. for all $2K$-sparse x:

  $$(1-\delta)\|\mathbf{x}\|_2^2 \leq \|\mathbf{A}\mathbf{x}\| \leq (1+\delta)\|\mathbf{x}\|_2^2$$

- $n = O(K \log N/K)$
- A also has small *coherence*

$$\mu \triangleq \max_{i \neq j} |\langle \mathbf{a}_i, \mathbf{a}_j \rangle|$$

CS Reconstruction

- Reconstruction using **sparse approximation**:
  - Find sparsest $\mathbf{x}$ such that $\mathbf{y} \approx \Phi\mathbf{x}$

- **Convex optimization** approach:
  - Minimize l_1 norm: e.g.,

$$\widehat{\mathbf{x}} = \arg\max_{\mathbf{x}} \|\mathbf{x}\|_1 \quad \text{s.t. } \mathbf{y} = \mathbf{A}\mathbf{x}$$

- **Greedy algorithms** approach:
  - MP, OMP, ROMP, StOMP, CoSaMP, …
  - PYAMP (Pick Your Acronym Matching Pursuit)

- If coherence μ or RIP δ is ***small***: Exact reconstruction

FUSION FRAMES

Fusion Frame

A collection of subspaces $\{W_j\}, j=1,\ldots,N$ and a set of weights v_j such that there exist universal constants $0<A\leq B<\infty$:

$$A\|\mathbf{x}\|_2^2 \leq \sum_{j=1}^{N} v_j^2 \, \|\mathbf{P}_j(\mathbf{x})\|_2^2 \leq B\|\mathbf{x}\|_2^2, \text{ for all } \mathbf{x} \in \mathbb{R}^M$$

Similar to the definition of a frame:

$$A\|\mathbf{x}\|_2^2 \leq \sum_{j=1}^{N} |\langle \mathbf{f}_j, \mathbf{x}\rangle|_2^2 \leq B\|\mathbf{x}\|_2^2, \text{ for all } \mathbf{x} \in \mathbb{R}^M$$

Extends the concepts of a frame to a

richer, more descriptive representation

Fusion Frame

A collection of subspaces $\{W_j\}, j=1,\ldots,N$ and a set of weights v_j such that there exist universal constants $0<A\leq B<\infty$:

$$A\|\mathbf{x}\|_2^2 \leq \sum_{j=1}^{N} v_j^2 \|\mathbf{P}_j(\mathbf{x})\|_2^2 \leq B\|\mathbf{x}\|_2^2, \text{ for all } \mathbf{x} \in \mathbb{R}^M$$

Projection onto W_j

Similar to the definition of a frame:

$$A\|\mathbf{x}\|_2^2 \leq \sum_{j=1}^{N} |\langle \mathbf{f}_j, \mathbf{x}\rangle|_2^2 \leq B\|\mathbf{x}\|_2^2, \text{ for all } \mathbf{x} \in \mathbb{R}^M$$

Extends the concepts of a frame to a

richer, more descriptive representation

Fusion Frame Vectors

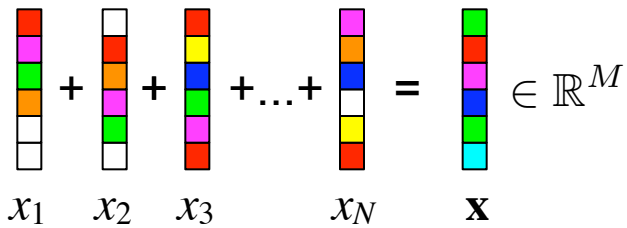

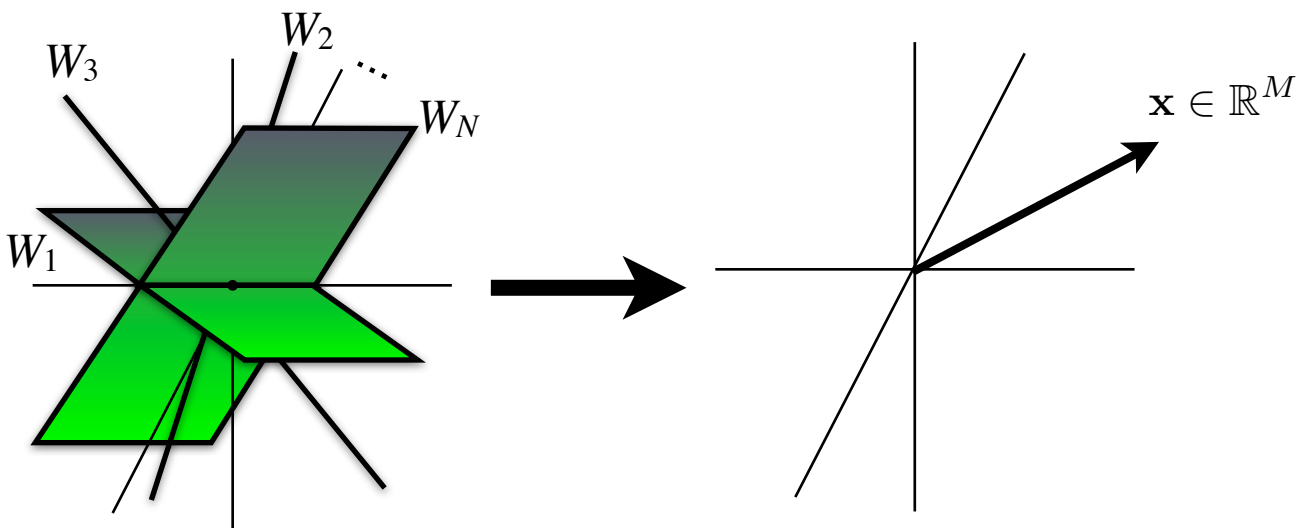

Fusion frame vector: $\mathbf{x} = \sum_{j=1}^{N} v_j x_j, \; x_j \in W_j, \; j = 1, \ldots, N$

The x_j can be thought of as **vector-valued "coefficients"**

Fusion Frame Sparsity

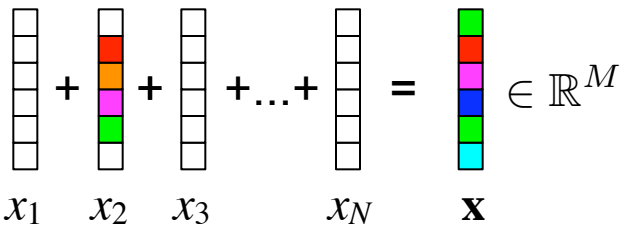

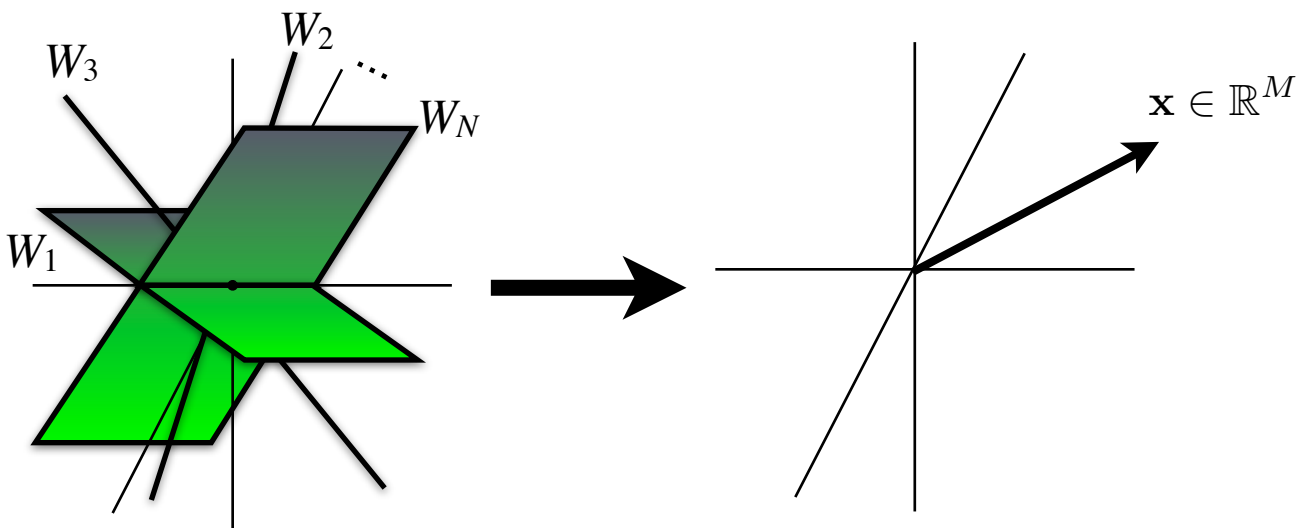

Fusion frame vector: $\mathbf{x} = \sum_{j=1}^{N} v_j x_j, \; x_j \in W_j, \; j = 1, \ldots, N$

The x_j can be thought of as **vector-valued "coefficients"**

Sparsity: very **few** of the x_j are non-zero

COMPRESSED SENSING FOR FUSION FRAMES

Fusion Frame Measurements

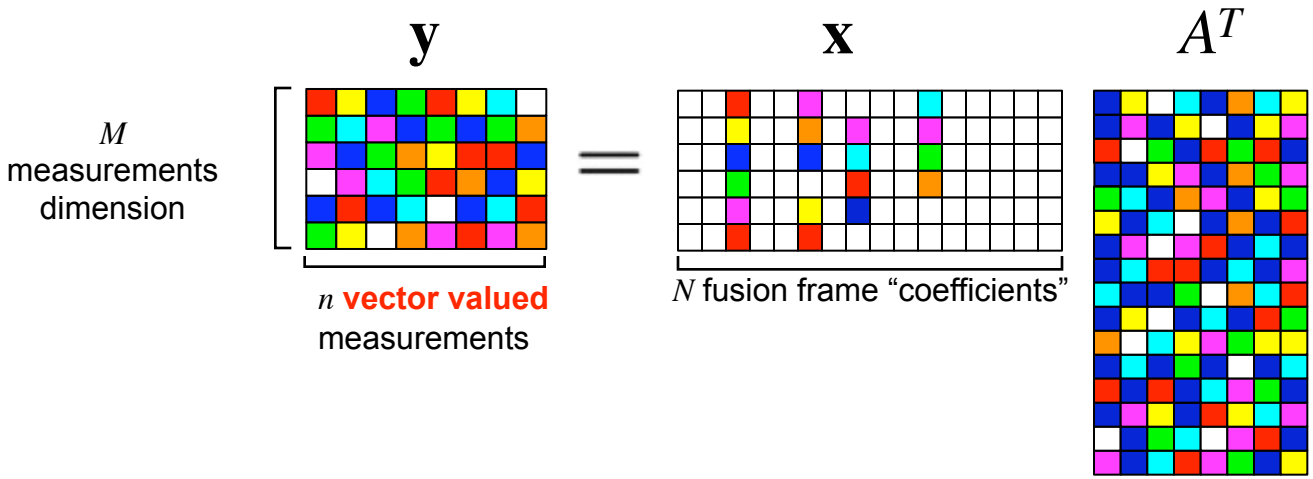

$$\mathbf{y} = \mathbf{x}\mathbf{A}^T$$

$\mathbf{x}$ has a **sparse** fusion frame representation

Can we recover $\mathbf{x}$ using an l_1-type minimization?

But what is l_1 in this case?

Fusion frame l_1 Norm

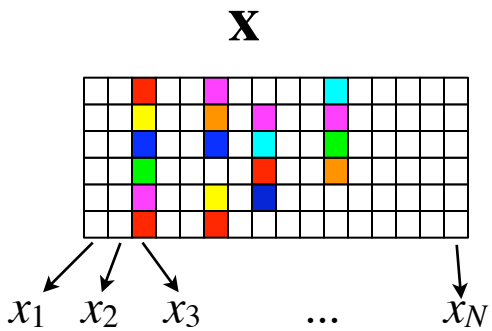

$$\|\mathbf{x}\|_1 \triangleq \sum_{j=1}^{N} \|x_j\|_2$$

Fusion frame l_1 norm: mixed l_1/l_2 norm of the fusion frame coefficients

Signal Recovery:

$$\widehat{\mathbf{x}} = \arg\min_{\mathbf{x}} \|\mathbf{x}\|_1 \text{ s.t. } \mathbf{y} = \mathbf{x}\mathbf{A}^T$$

When does this work?

Compressed Sensing Measurement Model

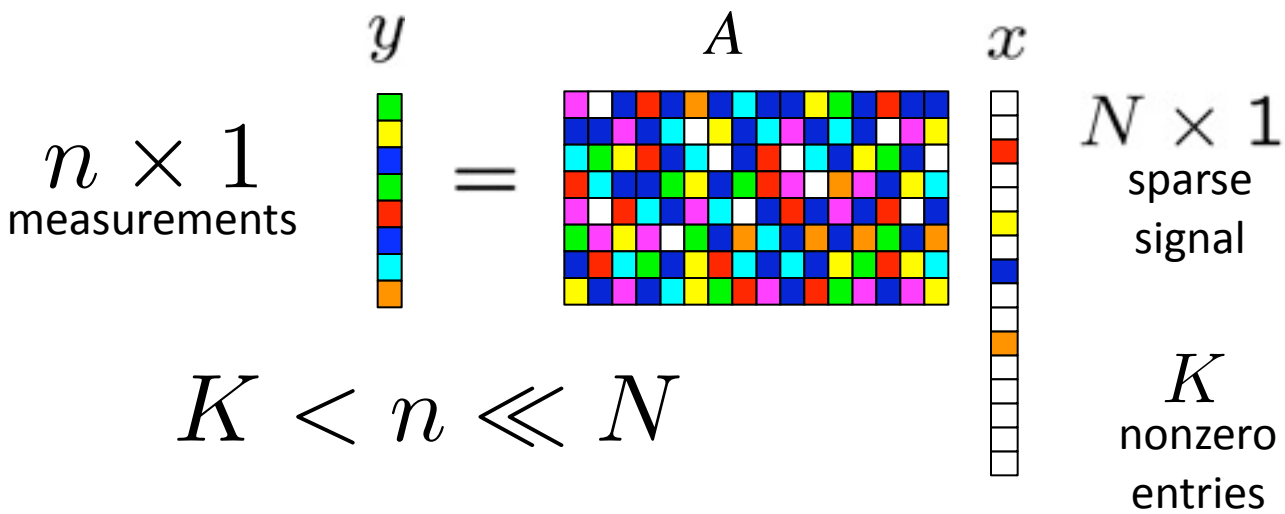

$$K < n \ll N$$

- x is K-sparse or K-compressible
- A **random**, satisfies a *restricted isometry property (RIP)*

A has RIP of order $2K$ with constant δ

If there exists δ s.t. for all $2K$-sparse x:

$$(1-\delta)\|\mathbf{x}\|_2^2 \leq \|\mathbf{A}\mathbf{x}\| \leq (1+\delta)\|\mathbf{x}\|_2^2$$

- $n = O(K \log N/K)$
- A also has small *coherence*

$$\mu \triangleq \max_{i \neq j} |\langle \mathbf{a}_i, \mathbf{a}_j \rangle|$$

Compressed Sensing Measurement Model

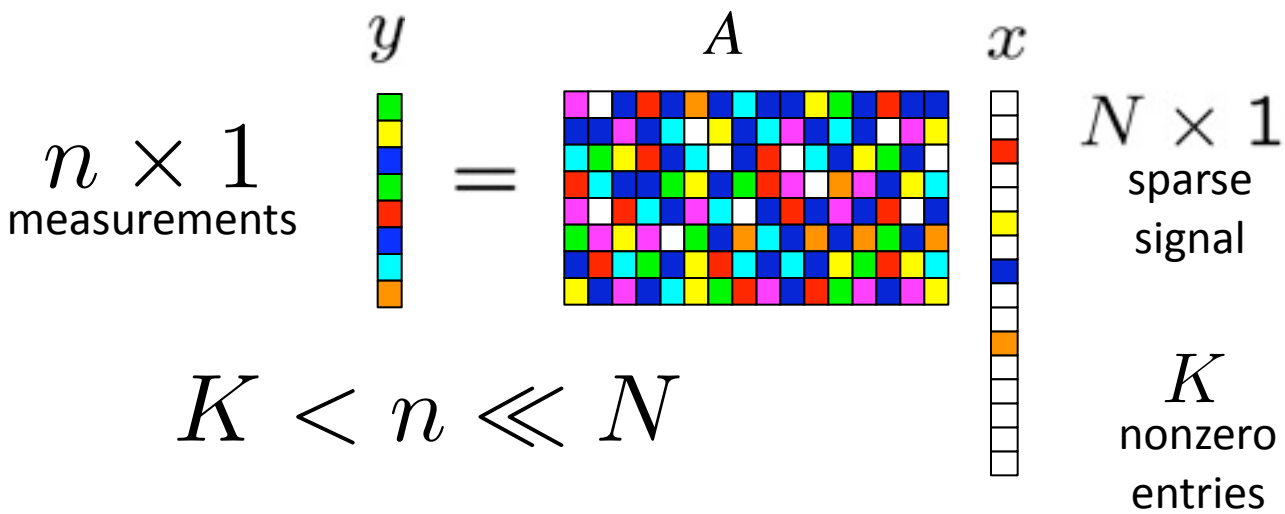

$$K < n \ll N$$

- x is K-sparse or K-compressible
- A **random**, satisfies a *restricted isometry property (RIP)*

A has RIP of order $2K$ with constant δ

If there exists δ s.t. for all $2K$-sparse x:

$$(1-\delta)\|\mathbf{x}\|_2^2 \leq \|\mathbf{A}\mathbf{x}\| \leq (1+\delta)\|\mathbf{x}\|_2^2$$

- $n = O(K \log N/K)$
- A also has small *coherence*

$$\mu \triangleq \max_{i \neq j} |\langle \mathbf{a}_i, \mathbf{a}_j \rangle|$$

Equivalent for fusion frame measurements?

Restricted Isometry Property

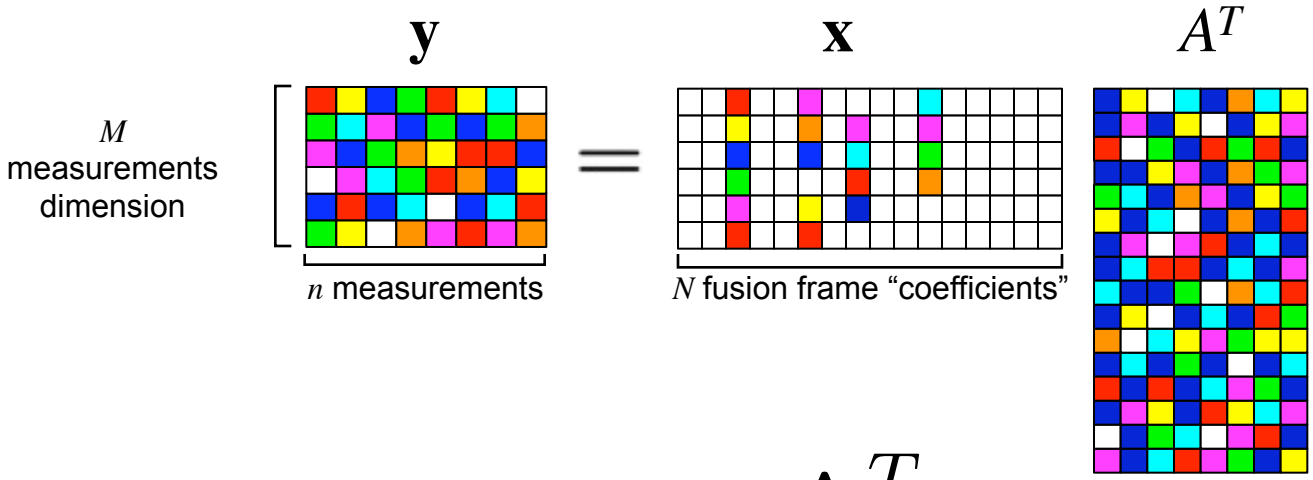

$$\mathbf{y} = \mathbf{x}\mathbf{A}^T$$

- If A has RIP of order 2K we can still recover vectors with a K-sparse fusion frame representation.
- RIP definition does not change
- Recovery using l_1/l_2 minimization

Fusion l_1 norm (mixed l_1/l_2)

$$\widehat{\mathbf{x}} = \arg\min_{\mathbf{x}} \|\mathbf{x}\|_1 \text{ s.t. } \mathbf{y} = \mathbf{x}\mathbf{A}^T$$

- RIP definition doesn't change.
- Special structure of the fusion frame not incorporated in the RIP

Fusion Coherence

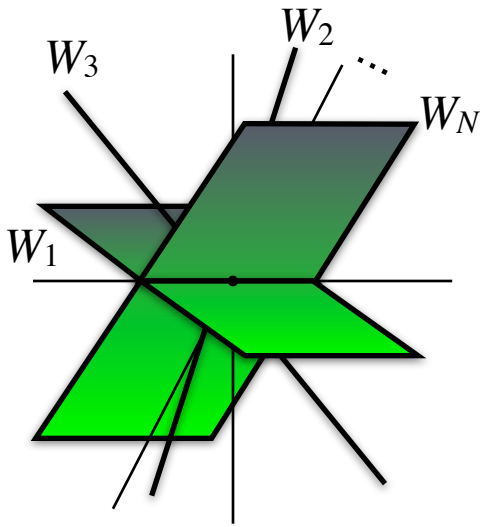

$$\mu_f = \max_{j \neq k} \left[|\langle \mathbf{a}_j, \mathbf{a}_k \rangle| \cdot |\lambda_{\max}(\mathbf{P}_j \mathbf{P}_k)|^{1/2} \right]$$

Reconstruction possible if:

$$K < \frac{1}{2}\left(1 - \mu_f^{-1}\right)$$

- P_j,P_k: Projection onto W_j,W_k
- $\lambda_{\max}$: Largest eigenvalue of $(\mathrm{P}_j\mathrm{P}_k)$
  - max cosine of principal angles between subspaces
  - Large angles ↔ small $\lambda_{\max}$ ↔ can have large $|\langle \mathbf{a}_j, \mathbf{a}_k \rangle|$
- Incorporates information about subspace structure

Fusion Coherence

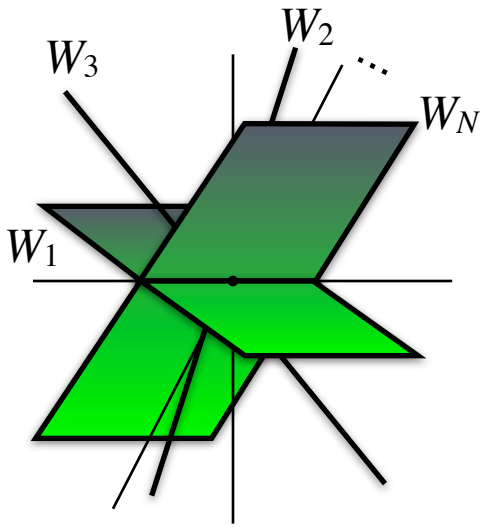

$$\mu_f = \max_{j \neq k} \left[|\langle \mathbf{a}_j, \mathbf{a}_k \rangle| \cdot |\lambda_{\max}(\mathbf{P}_j \mathbf{P}_k)|^{1/2} \right]$$

Standard Definition

Incorporates fusion frame properties

Reconstruction possible if:

$$K < \frac{1}{2}\left(1 - \mu_f^{-1}\right)$$

- P_j, P_k: Projection onto W_j, W_k
- λ_{max}: Largest eigenvalue of $(P_j P_k)$
  - max cosine of principal angles between subspaces
  - Large angles ↔ small λ_{max} ↔ can have large $|\langle \mathbf{a}_j, \mathbf{a}_k \rangle|$
- Incorporates information about subspace structure

CONNECTIONS

Block Sparsity

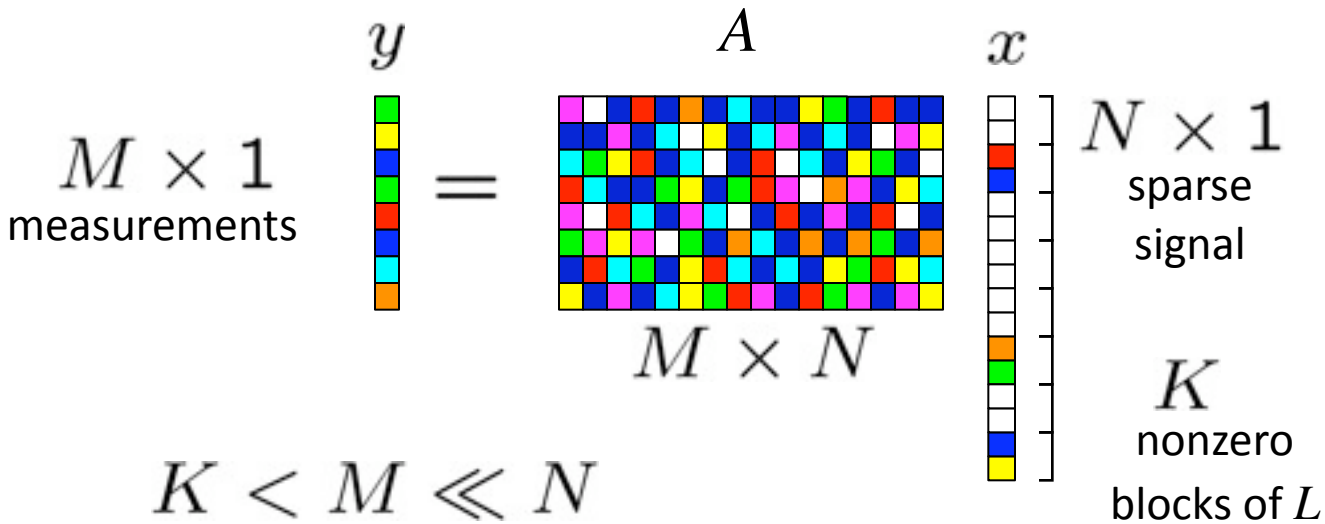

Mixed l_1/l_2 norm known to work and proven if $\mathbf{A}$ has RIP.

Blocks are not allowed to overlap

Joint Sparsity

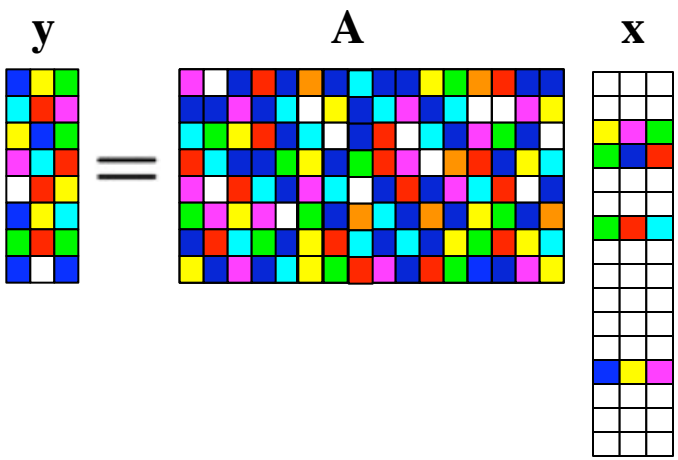

Joint Sparsity

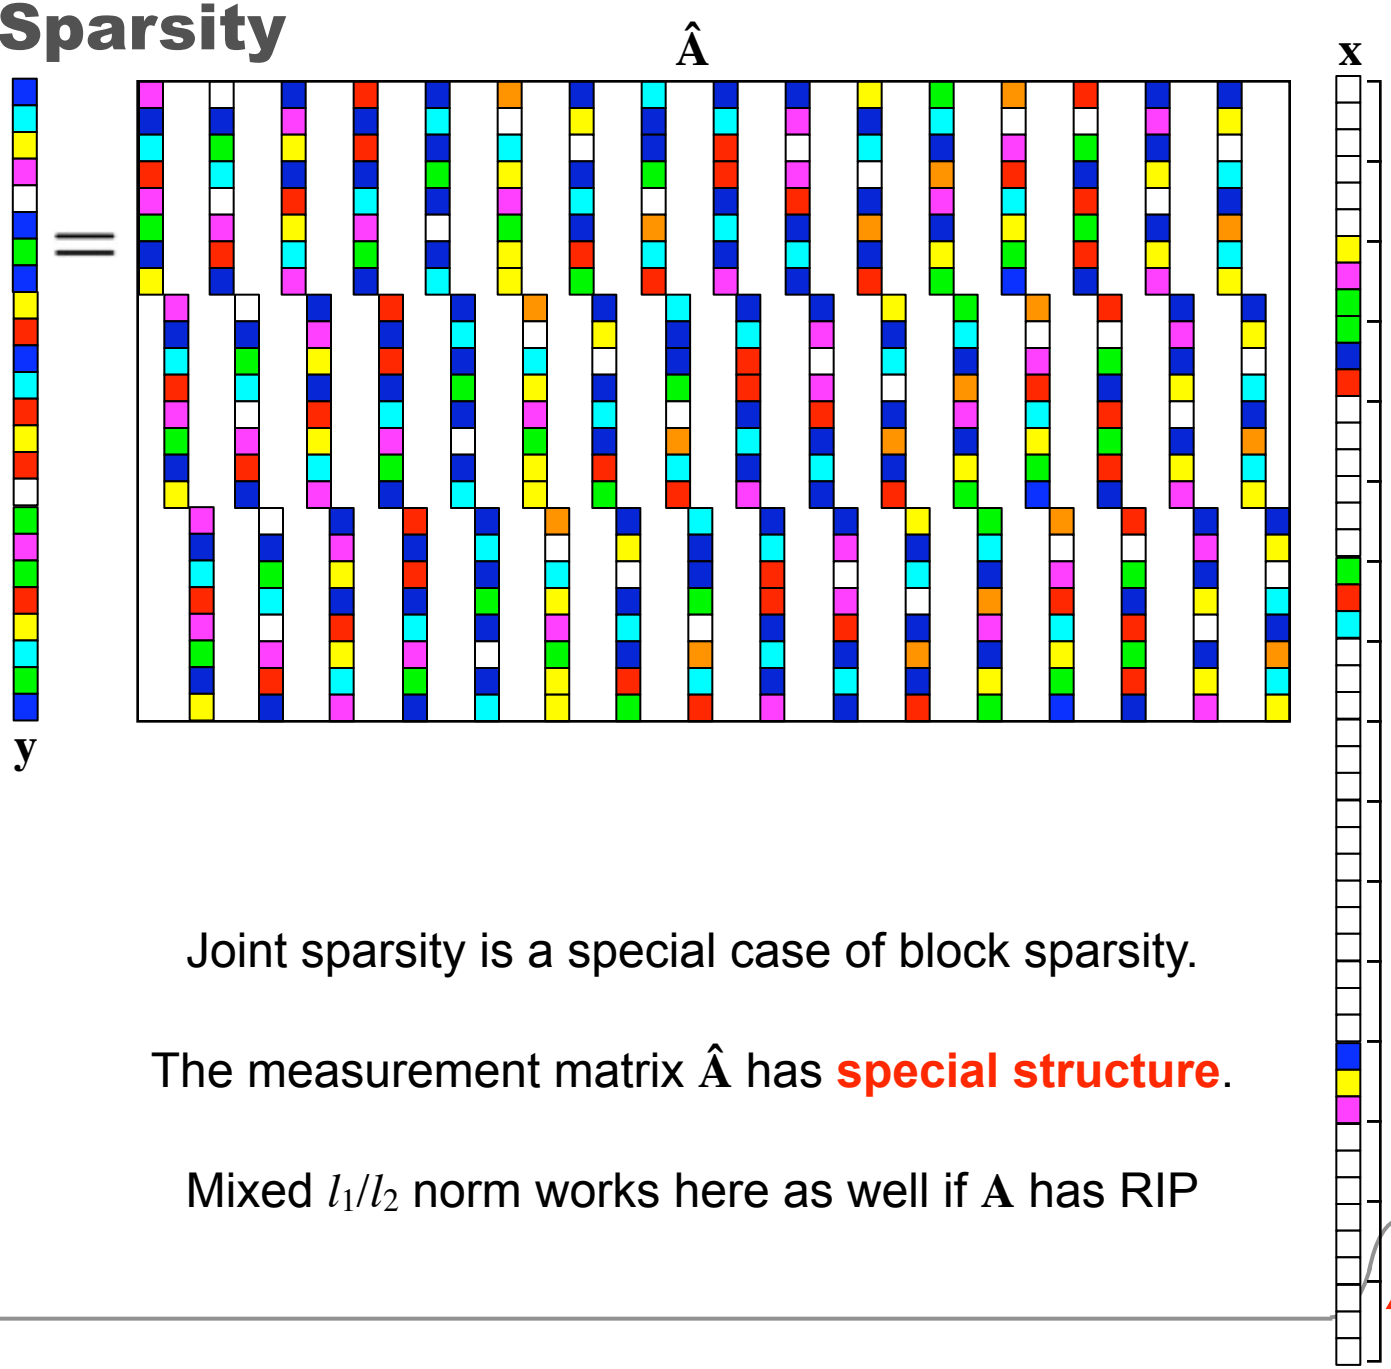

Joint sparsity is a special case of block sparsity.

The measurement matrix $\hat{\mathbf{A}}$ has **special structure**.

Mixed l_1/l_2 norm works here as well if $\mathbf{A}$ has RIP

Fusion Frame Measurements

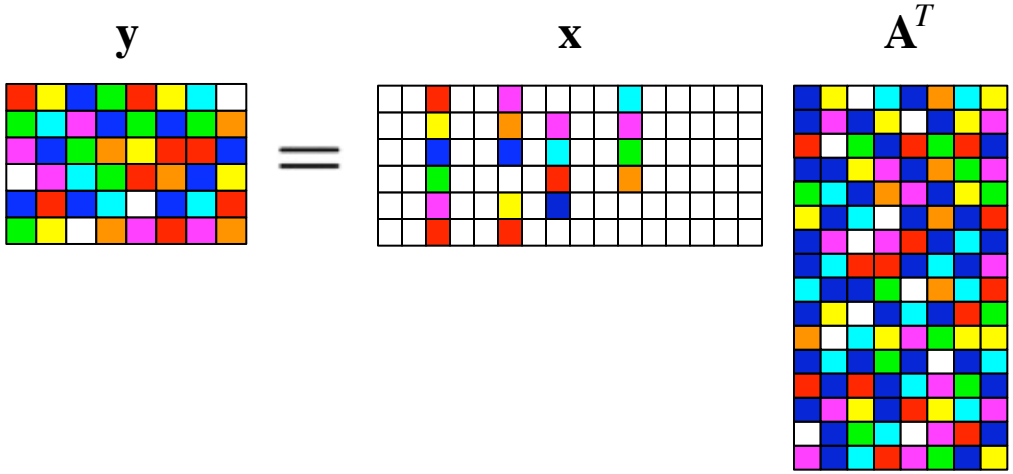

Fusion Frame Measurements

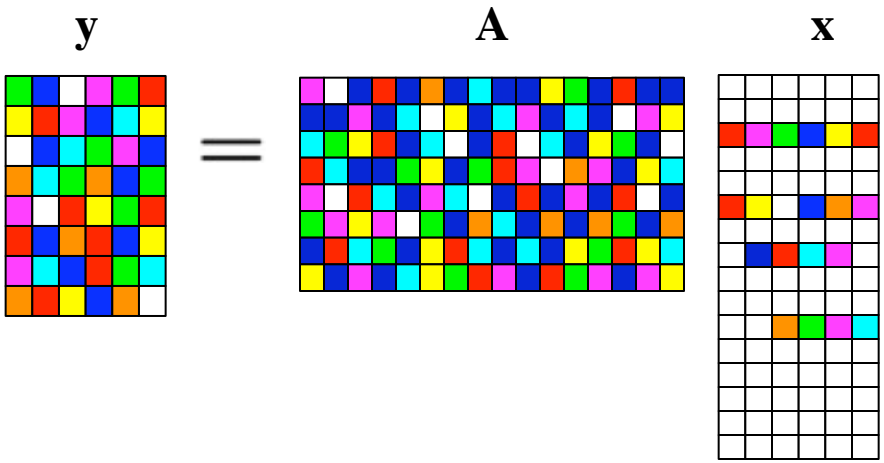

Fusion frame measurements generalize joint sparsity measurements

We use extra **information on the subspaces** to relax the requirements on $\mathbf{A}$

If $W_1 = W_2 = \ldots = W_N = \mathbb{R}^M$ we revert to joint sparsity

If $W_1 = W_2 = \ldots = W_N = \mathbb{R}$ we revert to standard CS

We are still a special case of block sparsity

Model Hierarchy

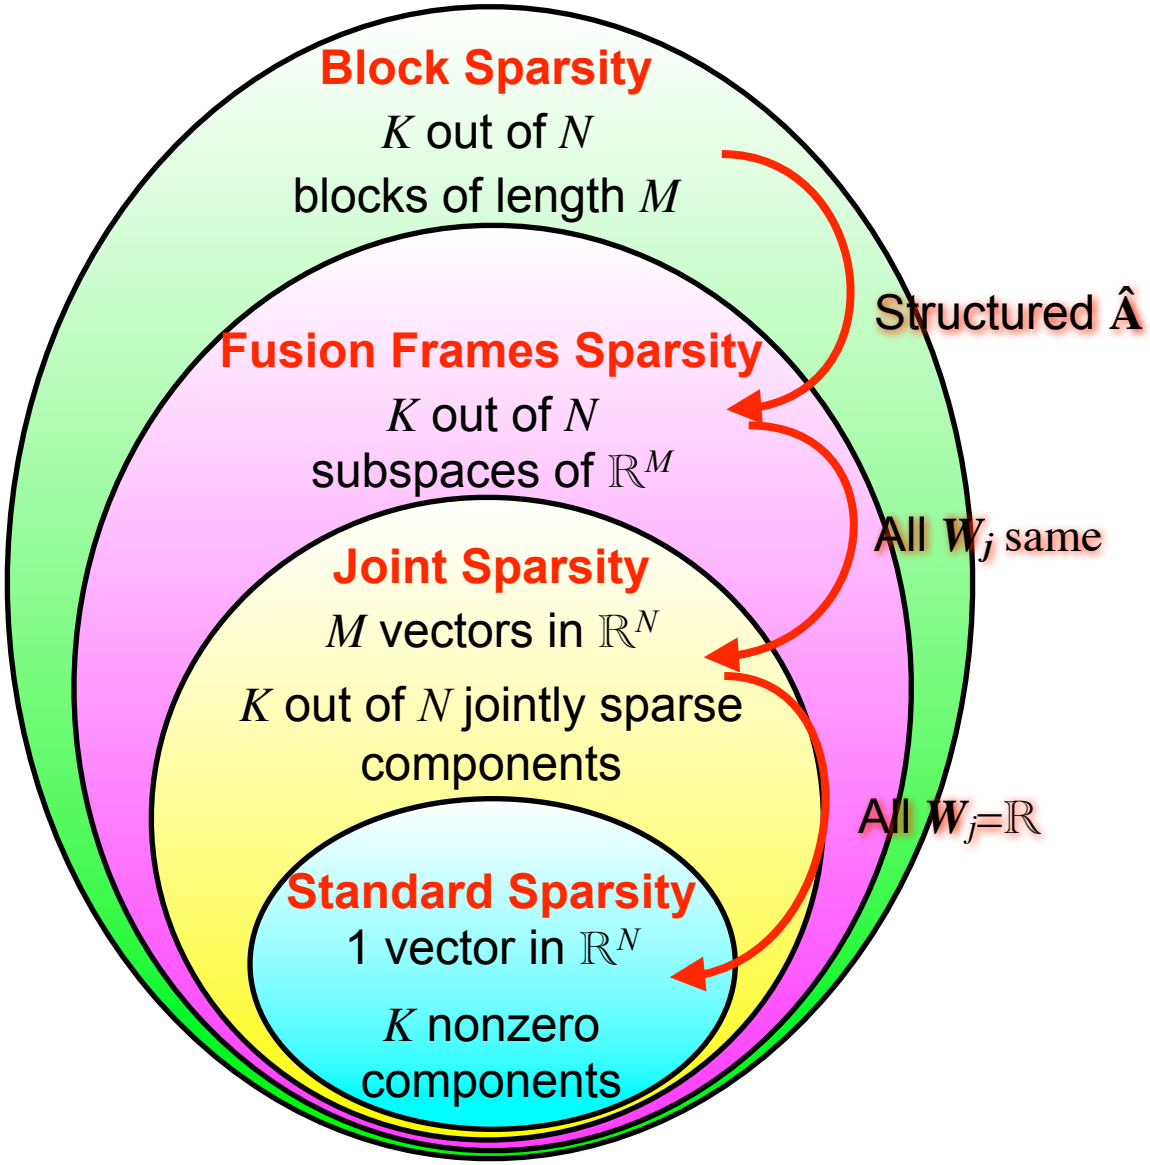

Model Hierarchy

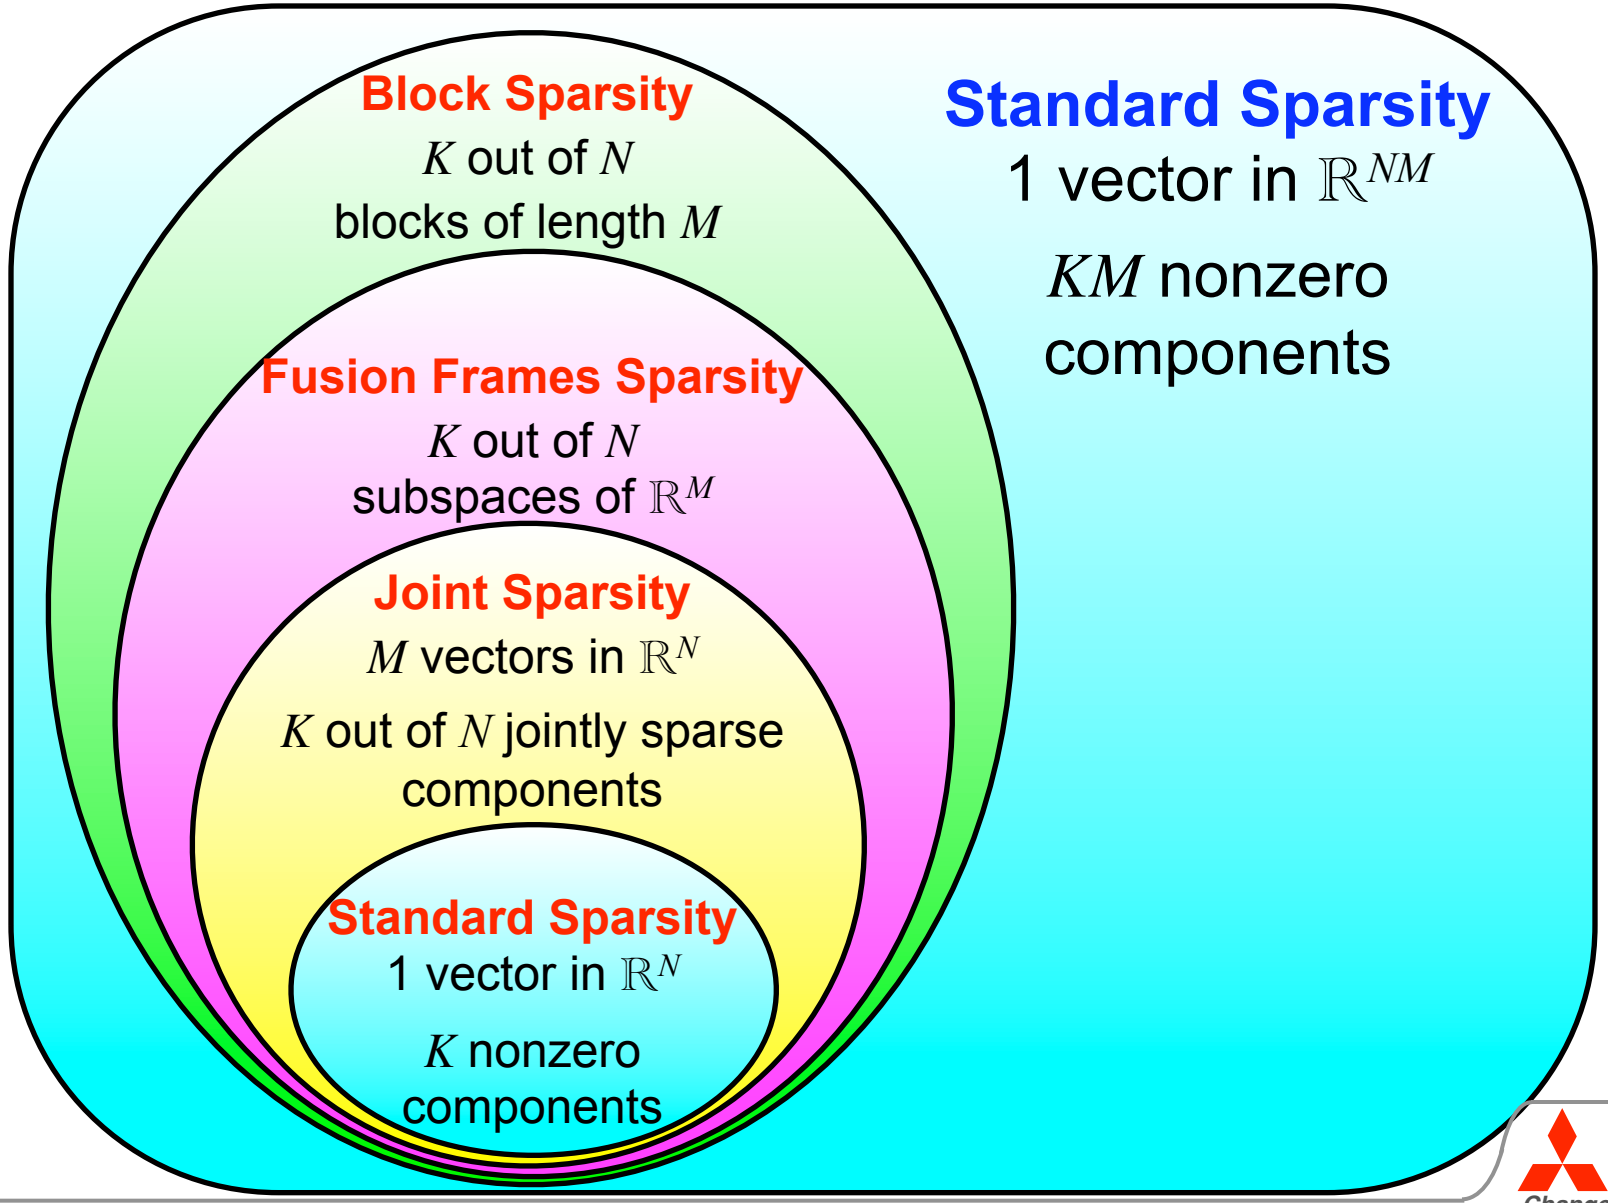

Application/Motivation: Dictionaries of Subspaces

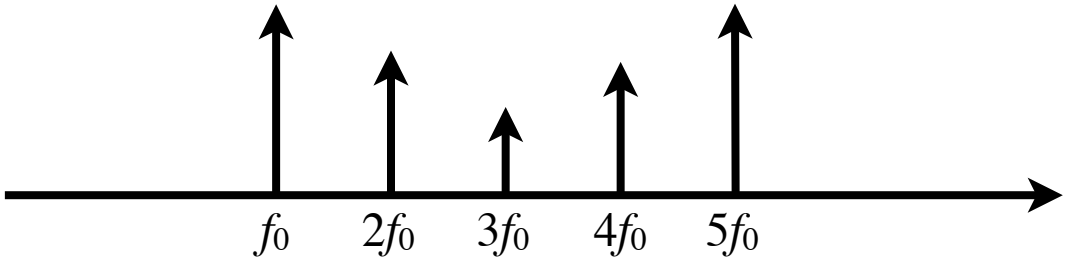

- Targets that span subspaces
  - e.g., harmonics of a fundamental frequency
- The dictionary becomes a collection of subspaces
  - Musical instruments
  - Vehicle identification
- First step for hierarchical identification
  - Once the subspace is identified, further local processing is more efficient

Conclusions

- We extended standard CS results to **fusion frames**
- Using l_1/l_2 norms everything transfers almost **as expected**
- We exploit the **rich structure** of fusion frames
- **Fusion coherence** incorporates this structure
- Still to do: incorporate the structure in **RIP**
- A richer model for **joint sparsity**
- A model for vector based measurements